


UHWIII

UHWIII1.17 New Generation Command Center Narrow Pitch LED Display Unit



Product features:

1. Ultra-thin cabinet with 39mm thickness.
2. Deep energy saving.
3. Full front and rear maintenance.
4. Smart remote controller*.
5. Intelligent operation and maintenance, death pixel detection*.

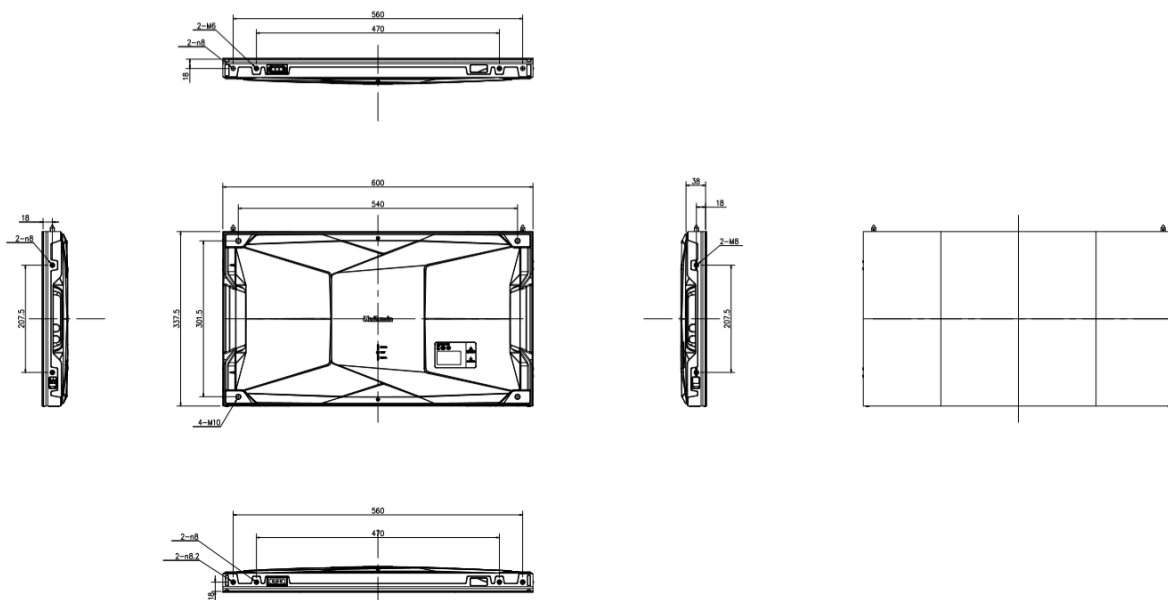

* Optional function

Main Technical Specifications:

Parameter	Value
Pixel Pitch	1.17
LED Type	SMD
Brightness	600cd/ m ²
Pixels Per Module	128x144pixels
Pixel Density	728,177pixels /m ²
Pixels Per Panel	512x288pixels
Module Size	150mm×168.75mm
Panel Size	600mm×337.5mm×39mm
Weight	6kg/panel
Maintenance	Full Front & Rear
Ingress Protection	Rear IP30
Curve	/
Planeness	≤0.15mm
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Color Temperature	2,000K-9,500K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	5000:1
Input Power <Max>	142W/panel
Input Power <Typical>	47W/panel
Input Voltage	100~240 V (50~60Hz)
Processing Depth	16bit
Refresh Rate	1920~3840Hz
Video Frame Rate	50/60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10℃~+40℃/ 10~80% RH
Storage Temperature/Humidity	-20℃~+60℃/ 10~85% RH

Note: Specifications are for reference only and are subject to change without notice.

Power consumption tolerance: ±15%, according to the actual situation.